




Position	Qty.	Description	Single Price
	1	<p>SEV.65.80.30.2.50D</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 96048185</p> <p>Highly advanced pumps with many unique features. The Grundfos SEV ranges are technologically advanced pumps designed for handling wastewater, process water and unscreened raw sewage in heavy-duty municipal utilities and industrial applications. These heavy-duty pumps are built for years of trouble-free operation in the most demanding applications. The pumps may be installed submerged or dry without motor cooling; in either case they are extremely reliable and very easy to service. The efficient SuperVortex impellers provides free passage of solids up to 65 mm. This greatly reduces the risk of clogging and ensures maximum up-time and reduced operating costs.</p> <p>Advanced technology inside out The Grundfos SEV pumps feature advanced technology inside out. In spite of their good looks, these highly efficient pumps are designed for years of trouble-free operation in the toughest environments. Easy to install and easy to service, the SEV pumps ensure low long-term operating costs.</p> <p>Watertight cable connection Polyurethane-filled stainless steel cable connection, hermetically sealed. Ensures that liquid cannot penetrate through the cable into the motor.</p> <p>Short rotor shaft Compact motor construction with short rotor shaft reduces vibrations. Increases efficiency and lifetime of shaft seal and ball bearings.</p> <p>Liquid-less motor cooling Solid-block stator housing with built-in cooling conduits, which efficiently transfer excess heat to pumped liquid via a solid cast intermediate cooling flange. This allows for continuous operation even in a dry installation.</p> <p>Double mechanical shaft seal Efficient single-unit cartridge shaft seal system ensures longer operating time and less down-time. Easy to replace in the field without use of special tools.</p> <p>Stainless steel motor jacket Extremely robust impact-resistant stainless steel motor-housing jacket, with an</p>	



Position	Qty.	Description	Single Price
		<p>easy-to-clean smooth surface.</p> <p>Stainless steel clamp Unique stainless steel clamp assembling system enables quick and easy disassembly of pump from motor unit. No tools required. Provides easy access for service and inspection.</p> <p>Modular design Each motor size fits several pump sizes with SuperVortex hydraulics.</p> <p>Operating conditions The Grundfos SEV pumps are suitable for continuous submerged operation with a liquid level just above the pump housing, or in a dry installation without separate motor cooling arrangements.</p> <p>Explosion-proof versions For applications involving a risk of explosion, or where otherwise required, explosion-proof versions of the Grundfos SEV pumps are available. The SEV pumps are in a II 2 GD, EEx d IIB 135°C (T4) c 135°C (T4) explosion protection classification according to EN standards 50 014-1997 / 50 018-2000 / 50 281-1-1. The SEV pumps are also available with a Class 1 Zone 2, Ex nA IIB 200°C (T3) classification in accordance with the IEC 60079-15:1987.</p> <p>Approvals The SEV.65, SEV.80 and SEV.100, have been approved according to DIN 12050-1, for use in buildings services by the German Building Technology Institute.</p> <p>Technical: Type of impeller: SUPER VORTEX Maximum particle size: 65 mm Primary shaft seal: SIC/SIC Secondary shaft seal: CARBON/CERAMICS Max. hydraulic efficiency: 34 % Approvals on nameplate: EN12050-1 Curve tolerance: ISO 9906:1999 Annex A</p> <p>Materials: Pump housing: EN-GJL-200 Impeller: EN-GJL-200</p> <p>Installation: Maximum ambient temperature: 40 °C Maximum operating pressure: 6 bar Flange standard: DIN Pump outlet: DN 80 Pressure stage: PN 10 Maximum installation depth: 20 m</p> <p>Liquid: Liquid temperature range: 0 .. 40 °C Liquid temp: 20 °C Density: 998.2 kg/m³</p> <p>Electrical data:</p>	

GRUNDFOS®

Company name:

Created by:

Phone:





Fax:

Date:

2/18/2014

Position	Qty.	Description	Single Price
		Number of poles: 2 Power input - P1: 3.8 kW Rated power - P2: 3 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415 V Voltage tolerance: +6/-10 % Start. method: direct-on-line Max starts per. hour: 20 Rated current: 6,8-6,5 A Rated current at 3/4 load: 5 A Rated current at 1/2 load: 3.9 A Starting current: 51 A Rated current at no load: 2.5 A Cos phi - power factor: 0,87 Cos phi - p.f. at no load: 0,22 Cos phi - p.f. at 3/4 load: 0,83 Cos phi - p.f. at 1/2 load: 0,74 Rated speed: 2910 rpm Locked-rotor torque: 23 Nm Breakdown torque: 33 Nm Moment of inertia: 0.0098 kg m ² Motor efficiency at full load: 79,6 % Motor efficiency at 3/4 load: 78,5 % Motor efficiency at 1/2 load: 75,1 % Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Explosion proof: no Length of cable: 10 m Cable type: LYNIFLEX Type of cable plug: NO PLUG Controls: Moisture sensor: without moisture sensors Water-in-oil sensor: without water-in-oil sensor Temp. sensor: N Others: Net weight: 94 kg	

Description	Value
Product name:	SEV.65.80.30.2.50D
Product No:	96048185
EAN number:	5700395064810
Technical:	
Max flow:	12.5 l/s
Head max:	21.4 m
Type of impeller:	SUPER VORTEX
Maximum particle size:	65 mm
Primary shaft seal:	SIC/SIC
Secondary shaft seal:	CARBON/CERAMICS
Max. hydraulic efficiency:	34 %
Approvals on nameplate:	EN12050-1
Curve tolerance:	ISO 9906:1999 Annex A
Materials:	
Pump housing:	EN-GJL-200
Impeller:	EN-GJL-200
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Pump outlet:	DN 80
Pressure stage:	PN 10
Maximum installation depth:	20 m
Inst dry/wet:	DRY/SUBMERGED
Installation:	horizontal or vertical
Liquid:	
Liquid temperature range:	0 .. 40 °C
Liquid temp:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Number of poles:	2
Power input - P1:	3.8 kW
Rated power - P2:	3 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415 V
Voltage tolerance:	+6/-10 %
Start. method:	direct-on-line
Max starts per. hour:	20
Rated current:	6,8-6,5 A
Rated current at 3/4 load:	5 A
Rated current at 1/2 load:	3.9 A
Starting current:	51 A
Rated current at no load:	2.5 A
Cos phi - power factor:	0,87
Cos phi - p.f. at no load:	0,22
Cos phi - p.f. at 3/4 load:	0,83
Cos phi - p.f. at 1/2 load:	0,74
Rated speed:	2910 rpm
Locked-rotor torque:	23 Nm
Breakdown torque:	33 Nm
Moment of inertia:	0.0098 kg m²
Motor efficiency at full load:	79,6 %
Motor efficiency at 3/4 load:	78,5 %
Motor efficiency at 1/2 load:	75,1 %
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Explosion proof:	no
Motor protec:	THERMAL SWITCH
Thermal protec:	internal
Length of cable:	10 m
Cable type:	LYNIFLEX
Type of cable plug:	NO PLUG

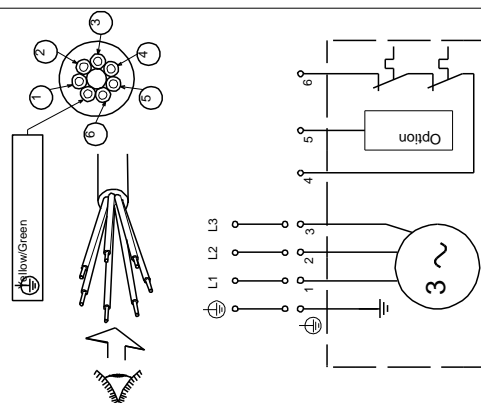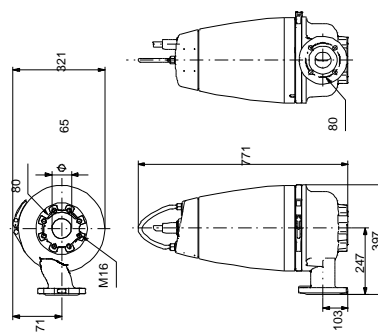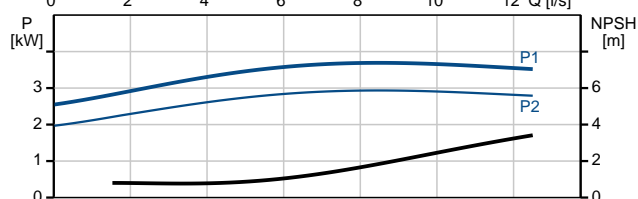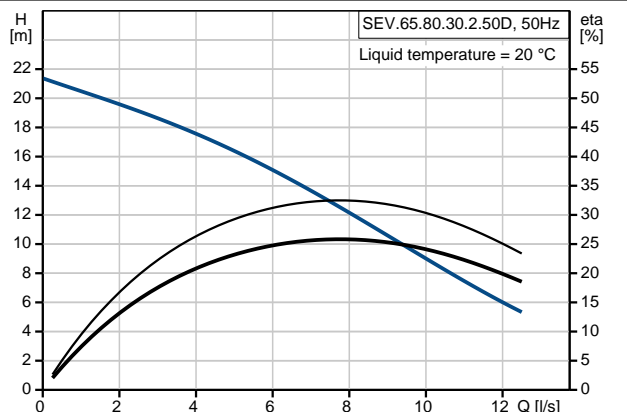



Company name:

Created by:

Phone:

Fax:

Date: 2/18/2014

Description	Value
-------------	-------

Controls:

Control box:	not included
Moisture sensor:	without moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
Temp. sensor:	N

Others:

Net weight:	94 kg
-------------	-------