

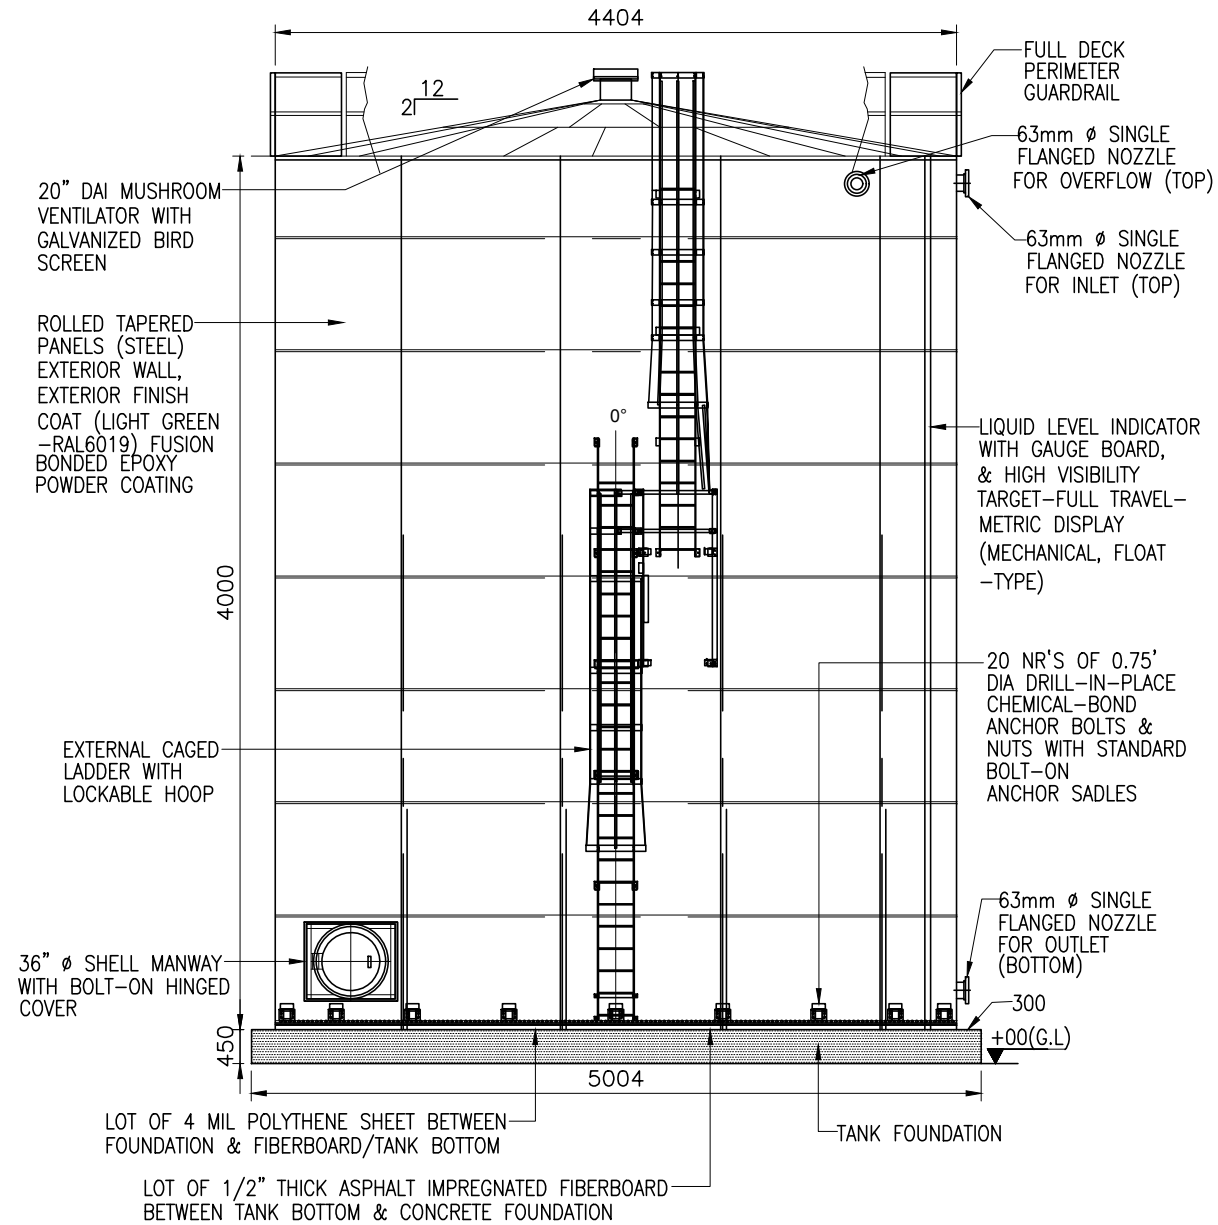


TREATED WATER TANK & FOUNDATION PLAN

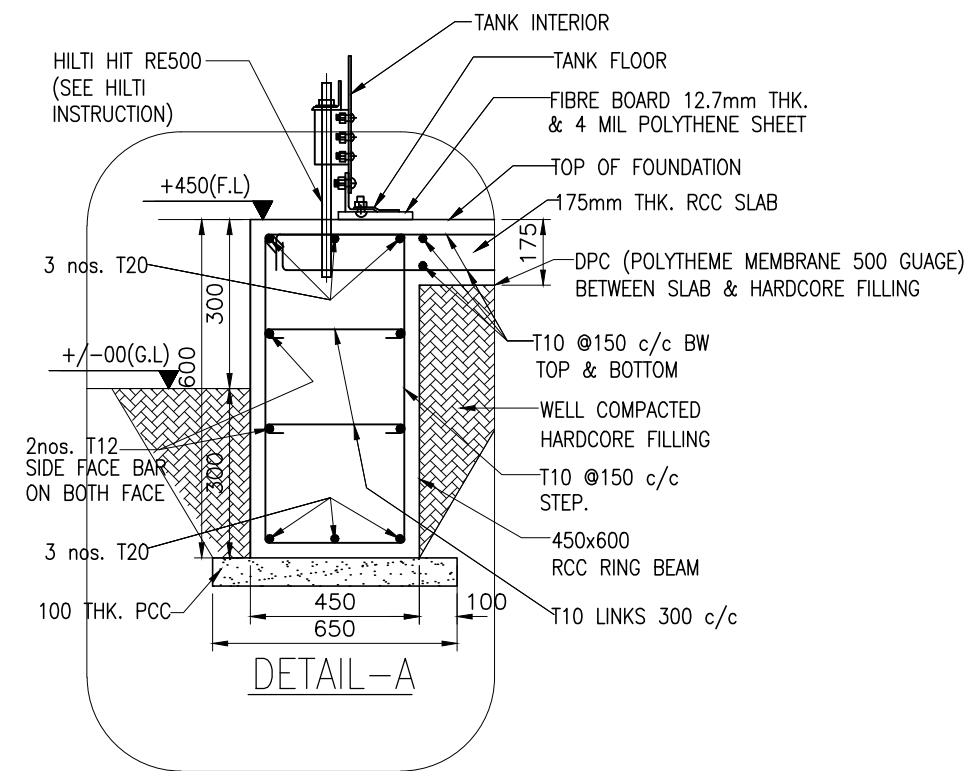

TREATED WATER TANK & FOUNDATION-ELEVATION

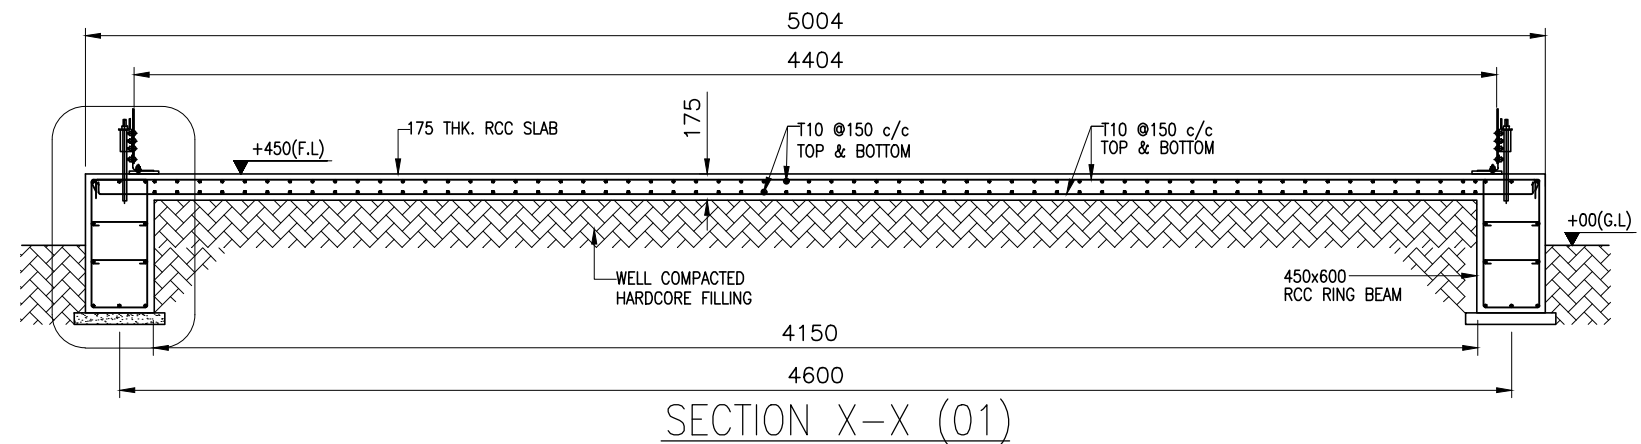

NOTES:-

- ALL DIMENSIONS ARE IN MILLIMETRES AND ALL LEVELS AER IN METRES, UNLESS OTHERWISE NOTED.
- DRAWINGS ARE NOT TO BE SCALED. ONLY WRITTEN DIMENSIONS ARE TO BE FOLLOWED.
- ALL CONCRETE WORK SHALL BE DESIGN GRADE C30.
- BLINDING CONCRETE WORK SHALL BE GRADE C10.
- ALL STRUCTURE WORK SHALL CONFORM TO BS 7668. GRADE 46A/ASTMA36. ALL STRUCTURAL MEMBERS SHALL BE HOT DIP GALVANIZED AND PAINTED AS PER SPECIFICATIONS.
- STEEL BARS DENOTED "T" SHALL BE HYSD BARS OF GRADE 460 CONFIRMING TO BS 4449
- NET SBC OF 15T/SQM IS CONSIDERED IN THE DESIGN.
- CLEAR COVER TO REINFORCEMENT
 - BEAM -40mm
 - SLAB -25mm



VIVEK V. PAGNIS
(STRUCTURAL ENGINEER)

TENDER PURPOSE

CLIENT					MINISTRY OF ENVIRONMENT AND ENERGY MALE' REPUBLIC OF MALDIVES				
PROJECT					PROVISION OF RAINWATER HARVESTING SYSTEM IN 10 ISLANDS				
ASSIGNMENT					CONSULTANCY SERVICES FOR DESIGN AND SUPERVISION OF RAINWATER HARVESTING SYSTEM IN SH. NOOMARA, SH. BILEHFAH, SH. FEYDHOO, SH. FEEVAH, SH. NARUDHOO, SH. LHAMAGU, SH. FUNADHOO, N. HENBATHOO, N. LHOHI, N. MAGOODHOO, MALDIVES [PACKAGE - 2]				
DRAWING TITLE					TYPICAL DRAWING OF TREATED WATER STORAGE TANK				
REVISION					APPROVED				
CONSULTANT					VVP				
SHAH TECHNICAL CONSULTANTS PVT. LTD., INDIA IN ASSOCIATION WITH DEVELOPMENT TECHNOLOGIES MALDIVES, MALDIVES					SSS				
					SPP				
					PDP				
SCALE					DATE				
AS SHOWN					FEB 2018				
DRAWING NUMBER					N.Magoodhoo/WS/08B				
					REVISION				
					0				