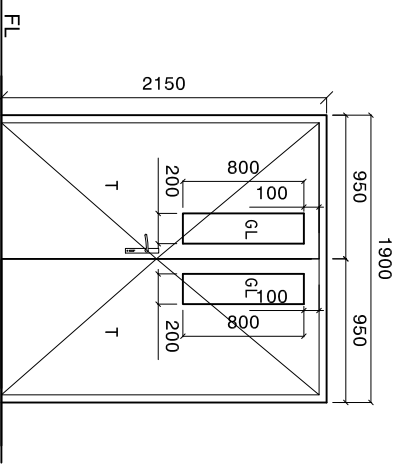
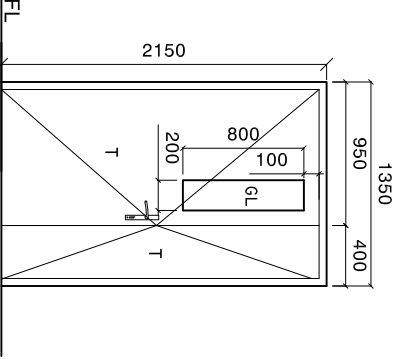
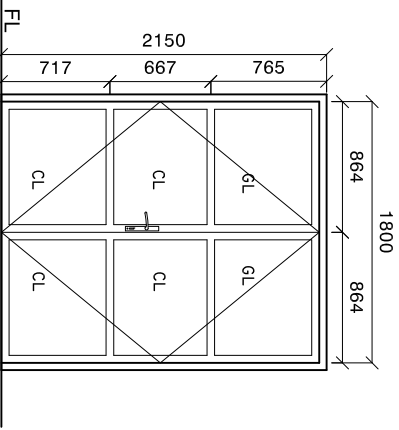
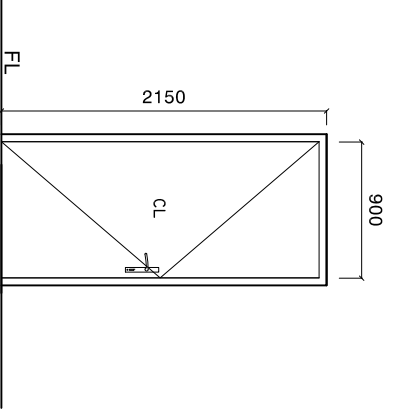
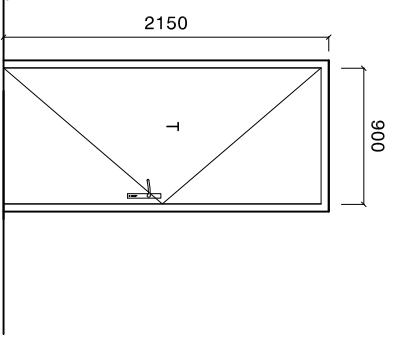
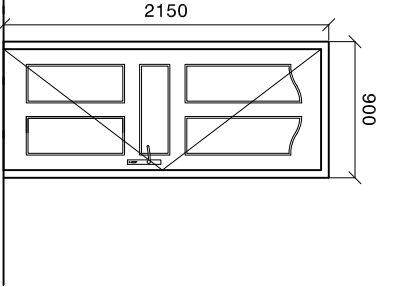
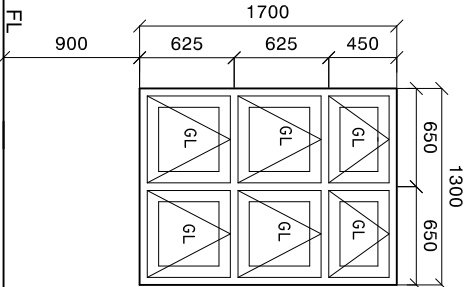
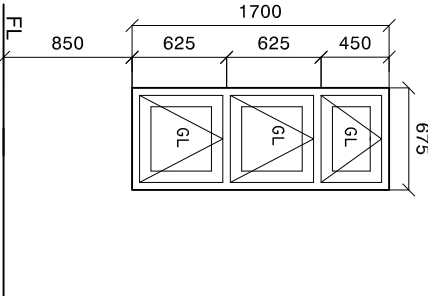
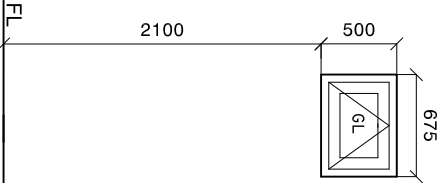


DOORS AND WINDOWS SCHEDULE

Scale 1:50

SYMBOL	D1	D2	D3	D4
<div>ELEVATION</div>				
	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR
	QUANTITY 01 NOS	QUANTITY 00 NOS	QUANTITY 00 NOS	QUANTITY 00 NOS
	FRAME TIMBER FRAME DOOR	FRAME TIMBER FRAME DOOR	FRAME ALUMINIUM FRAME DOOR 60-80 MICRON POWDER COATING	FRAME TIMBER FRAME DOOR
	PANEL TIMBER PANEL	PANEL TIMBER PANEL	PANEL ALUMINIUM 60-80 MICRON POWDER COATING	PANEL TIMBER PANEL
	FINISH PAINT FINISH	FINISH PAINT FINISH	FINISH ALUMINIUM IN 60-80 MICRON POWDER COATING	FINISH PAINT FINISH
HINGE	STAINLESS STEEL	HINGE STAINLESS STEEL	HINGE STAINLESS STEEL	HINGE STAINLESS STEEL
LOCK	STATE MAKE	LOCK STATE MAKE	LOCK STATE MAKE	LOCK STATE MAKE
NOTE	ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE

D5	D6	W1	W2	V1
				
LOCATION GROUND FLOOR	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR	LOCATION GROUND FLOOR
QUANTITY 00 NOS	QUANTITY 10 NOS	QUANTITY 00 NOS	QUANTITY 00 NOS	QUANTITY 06 NOS
FRAME TIMBER FRAME DOOR	SOLID TIMBER FRAME DOOR	FRAME ALUMINIUM FRAME DOOR	FRAME ALUMINIUM FRAME DOOR	FRAME ALUMINIUM FRAME DOOR
PANEL TIMBER PANEL	DECORATIVE SOLID TIMBER PANEL	PANEL ALUMINIUM 60-80 MICRON POWDER COATING	PANEL ALUMINIUM 60-80 MICRON POWDER COATING	PANEL ALUMINIUM 60-80 MICRON POWDER COATING
FINISH PAINT FINISH	FINISH PAINT FINISH	FINISH ALUMINIUM IN 60-80 MICRON POWDER COATING	FINISH ALUMINIUM IN 60-80 MICRON POWDER COATING	FINISH ALUMINIUM IN 60-80 MICRON POWDER COATING
HINGE STAINLESS STEEL	HINGE STAINLESS STEEL	HINGE STAINLESS STEEL	HINGE STAINLESS STEEL	HINGE STAINLESS STEEL
LOCK STATE MAKE	LOCK STATE MAKE	LOCK STATE MAKE	LOCK STATE MAKE	LOCK STATE MAKE
NOTE	ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE	NOTE ALL MEASUREMENTS TO BE CHECKED ON SITE

NOTE:

PROVIDE RC LINTEL ABOVE ALL DOOR/WINDOW/VENTILATOR UNITS NOT FIXED TO BEAMS
AND PROVIDE RC SILL BEAMS UNDER ALL WINDOW UNITS
ALL TIMBER DOORS AND WINDOWS TO BE MADE OF TIMBER, PUTTY SMOOTHED AND FINISHED WITH
ENAMEL PAINT AS SPECIFIED

SHEET CONTENTS :

REVISION NOTES:

PROJECT:
CONSTRUCTION OF NEW
HEALTH CENTER
BLOCK B

CLIENT:
MINISTRY OF HEALTH
LH. HINNAVARU

LOCATION:
CONTENTS: AS GIVEN
PROJECT MANAGER:

DESIGNER: ARIZ
CIV/STR. ENGINEER:
SURVEYED BY: -
DRAWN BY: ARIZ
CHECKED BY:
DATE :JUNE 2016
SHEET NO. : /



ADMIN DIVISION
Ministry of Health
Roshanee Building
Sri Lanka
Tel: 332 8887, Fax: 3328889