




SECTION B-B
SCALE 1:20

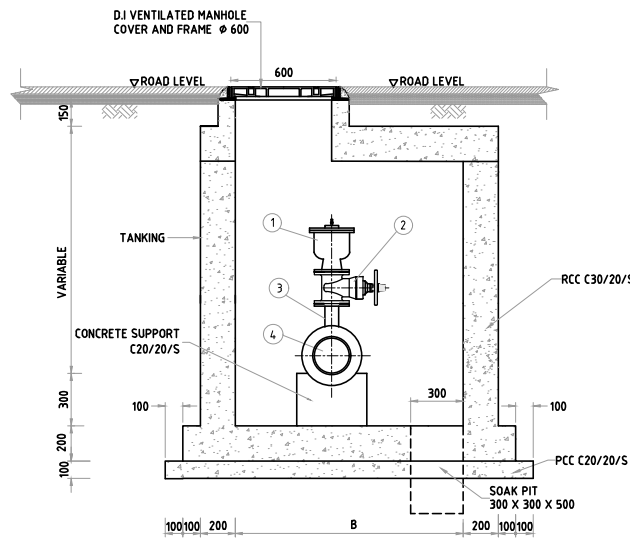


SECTION C-C
SCALE 1:20

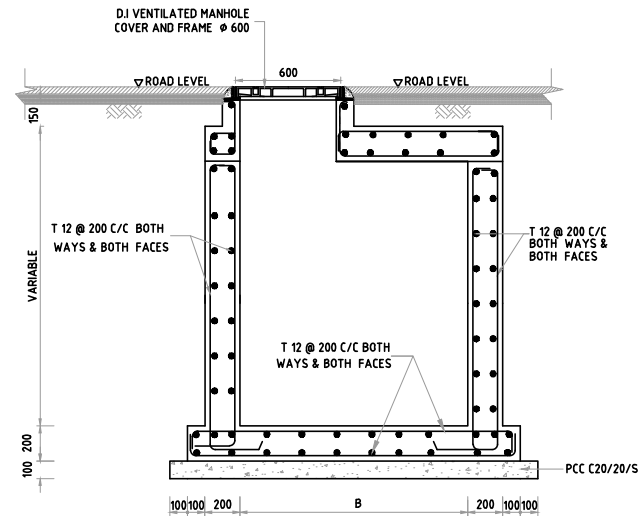


REINFORCEMENT DETAILS AT SECTION D-D
SCALE 1:20

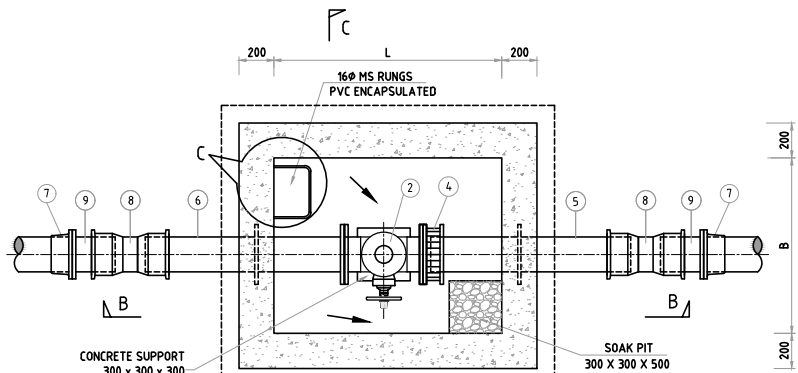


SECTIONAL BASE PLAN A-A
SCALE 1:20

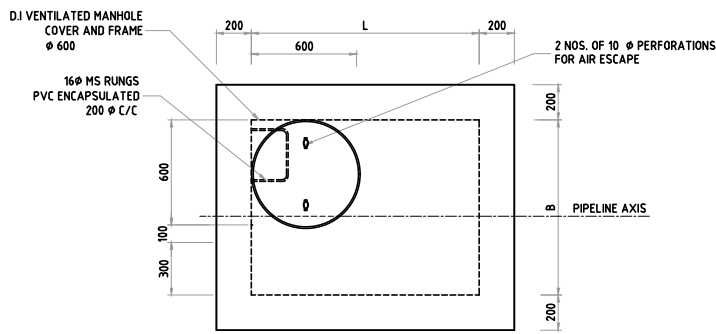


ROOF PLAN
SCALE 1:20

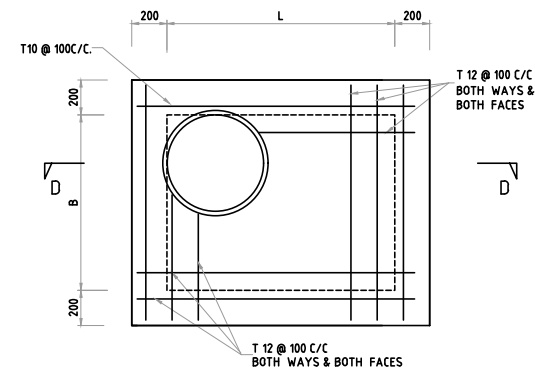


REINFORCEMENT DETAILS OF COVER SLAB
SCALE 1:20

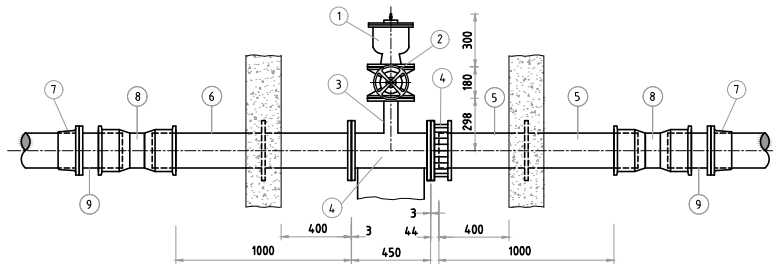

ELEVATION

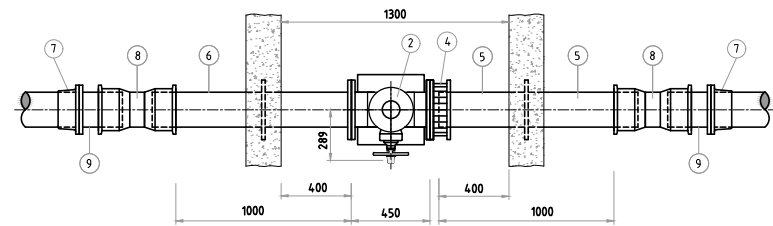

PLAN
GENERAL ARRANGEMENT OF AIR VALVE & FITTINGS FOR 300Ø PIPE
SCALE 1:20

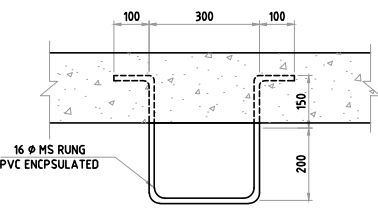

DETAIL - C
MS RUNGS
SCALE 1:10

FITTINGS		
PIPE DIA	S.NO	QUANTITY
150	1	DN 80 DOUBLE AIR VALVE
	2	DN GATE VALVE 80 MM DIA
	3	DN 150 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 150 MM DIA FLANGE ADAPTER
	5	DN 150 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 150 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 150 DI/PE ADAPTER
	8	DN 150 DI COLLAR
	9	DN 150 DI SHORT LENGTH FLANGED - SPIGOT PIECE
200	1	DN 80 DOUBLE AIR VALVE
	2	DN GATE VALVE 80 MM DIA
	3	DN 200 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 200 MM DIA FLANGE ADAPTER
	5	DN 200 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 200 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 200 DI/PE ADAPTER
	8	DN 200 DI COLLAR
	9	DN 200 DI SHORT LENGTH FLANGED - SPIGOT PIECE
250	1	DN 80 DOUBLE AIR VALVE
	2	DN GATE VALVE 80 MM DIA
	3	DN 250 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 250 MM DIA FLANGE ADAPTER
	5	DN 250 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 250 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 250 DI/PE ADAPTER
	8	DN 250 DI COLLAR
	9	DN 250 DI SHORT LENGTH FLANGED - SPIGOT PIECE
300	1	DN 80 DOUBLE AIR VALVE
	2	DN GATE VALVE 80 MM DIA
	3	DN 300 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 300 MM DIA FLANGE ADAPTER
	5	DN 300 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 300 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 300 DI/PE ADAPTER
	8	DN 300 DI COLLAR
	9	DN 300 DI SHORT LENGTH FLANGED - SPIGOT PIECE
350	1	DN 100 DOUBLE AIR VALVE
	2	DN GATE VALVE 100 MM DIA
	3	DN 350 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 350 MM DIA FLANGE ADAPTER
	5	DN 350 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 350 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 350 DI/PE ADAPTER
	8	DN 350 DI COLLAR
	9	DN 350 DI SHORT LENGTH FLANGED - SPIGOT PIECE
400	1	DN 100 DOUBLE AIR VALVE
	2	DN GATE VALVE 100 MM DIA
	3	DN 400 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 400 MM DIA FLANGE ADAPTER
	5	DN 400 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 400 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 400 DI/PE ADAPTER
	8	DN 400 DI COLLAR
	9	DN 400 DI SHORT LENGTH FLANGED - SPIGOT PIECE
450	1	DN 150 DOUBLE AIR VALVE
	2	DN GATE VALVE 150 MM DIA
	3	DN 450 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 450 MM DIA FLANGE ADAPTER
	5	DN 450 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 450 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 450 DI/PE ADAPTER
	8	DN 450 DI COLLAR
	9	DN 450 DI SHORT LENGTH FLANGED - SPIGOT PIECE
500	1	DN 150 DOUBLE AIR VALVE
	2	DN GATE VALVE 150 MM DIA
	3	DN 500 DI ALL FLANGED TEE WITH 80 MM BRANCHING
	4	DN 500 MM DIA FLANGE ADAPTER
	5	DN 500 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	6	DN 500 DI FLANGED SPIGOT PIPE WITH WELDED PUDDLE FLANGE
	7	DN 500 DI/PE ADAPTER
	8	DN 500 DI COLLAR
	9	DN 500 DI SHORT LENGTH FLANGED - SPIGOT PIECE

AIR VALVE CHAMBER DETAILS

No.	PIPE DIA (d)	L	B
1	150	900	1000
2	200	1000	1000
3	250	1250	1000
4	300	1300	1100
5	350	1300	1100
6	400	1350	1200
7	450	1450	1200
8	500	1500	1200

- ALL DIMENSIONS ARE IN MM
- FOR LOCATION AND DEPTHS OF GATE VALVE CHAMBER REFER TO DRAWINGS OF PIPELINE PLANS AND PROFILES.
- THE SPECIALS AND PIPE FITTINGS SHALL BE SELECTED TO SUIT THE SUPPLY PIPE LINE
- ALL THE VALVES, SPECIALS AND PIPES INSIDE THE CHAMBER SHOULD BE OF DUCTILE IRON
- GATE VALVE SHALL COMPLY WITH BS 5150 & AIR VALVE SHALL COMPLY WITH AWWA C-572
- DI PIPE & FITTING SHALL COMPLY WITH BS 4772
- BUILDING MATERIALS:-
DESCRIPTION OF BUILDING MATERIALS IS AS FOLLOWS
C 30 / 20 / S
SULPHATE RESISTANT CEMENT
MAXIMUM SIZE OF AGGREGATE

- CONCRETE:
A. MIXES SHALL COMPLY WITH BS 8110
B. MINIMUM 28 DAY CHARACTERISTIC STRENGTH IN ACCORDANCE WITH BS 8110
- COVER TO REINFORCEMENT TO BE 50MM.
- THE STEEL USED SHALL BE OF FY 350 GRADE.
- THE TANKING SHALL BE WITH TWO LAYERS OF BITUMINOUS PAINT FOR EXTERNAL SURFACES OF VALVE CHAMBER
- GATE VALVE CHAMBER TO BE PROVIDED FOR PIPE DIA 200 TO 300 MM
- MH COVER SHOULD COMPLY TO BS EN 124 CLASS D400

ABBREVIATIONS

- PIL - PIPE INVERT LEVEL.
MS - MILD STEEL.
DI - DUCTILE IRON.
PE - POLY ETHYLENE
RCC - REINFORCED CEMENT CONCRETE
PCC - PLAIN CEMENT CONCRETE

REVISION				
No.	DESCRIPTION	BY	DATE	APPR.
REVISION				
CONSULTANT				
SHAH TECHNICAL CONSULTANTS PVT. LTD., INDIA				
IN ASSOCIATION WITH				
DEVELOPMENT TECHNOLOGIES MALDIVES, MALDIVES				

CLIENT				
MINISTRY OF ENVIRONMENT AND ENERGY				
MALE, REPUBLIC OF MALDIVES				
PROJECT				
PROVISION OF RAINWATER HARVESTING SYSTEM IN 8 ISLANDS				
ASSIGNMENT				
CONSULTANCY SERVICES FOR DESIGN AND SUPERVISION OF RAINWATER HARVESTING SYSTEM IN GA, NILANDHOO, GA, MAAMENDHOO, GA, KONDEY, GDH, NADILLA, GDH, HOADEHDHOO, GDH, FIYOARI, GDH, RATHAFANDHOO, GDH, FARESMATHODAA, MALDIVES [PACKAGE - 5]				
DRAWING TITLE				
STANDARD DRAWING OF AIR RELEASE VALVE CHAMBER				
APPROVED				
SSS	SSS	DESIGNED	SPP	PDP
SCALE				
AS SHOWN	DATE	DRAWING NUMBER	REVISION	
	FEB 2018	WS/STD/02		0

TENDER PURPOSE